
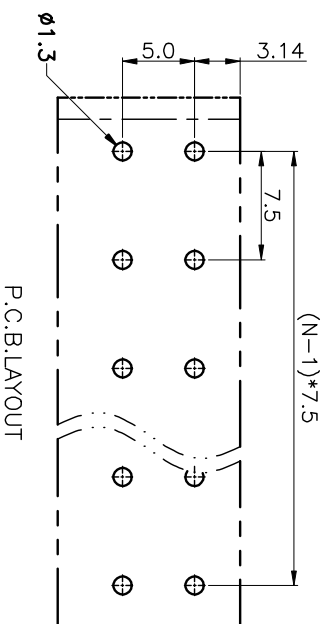
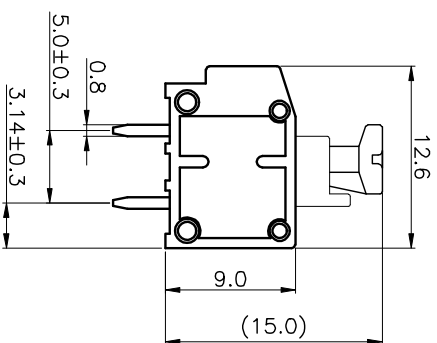
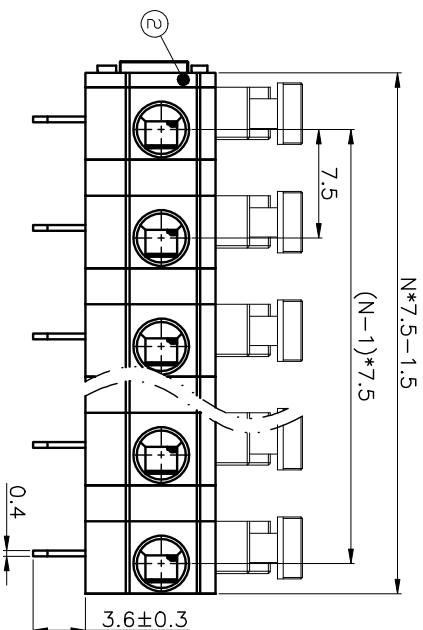



REV.	DESCRIPTION	DATE	DRAFTER	APPROVER
A1	DWG.REL	2020.05.27	DENG	JIN

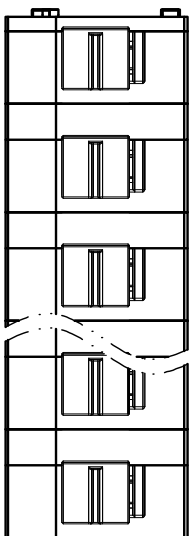


Pitch range	Nominal dimension range	PROJECTION	TITLE
>0	>30	UNIT	KF124B-7.5-XXP-1X
~6	~60	mm	
~10	~100	SHEET SIZE	A4
~24	~150	SERIES	KF124
±0.15	±0.30		
±0.30	±0.50		
±0.50	±0.70		
±1.00	±1.30		
±2'			

DRAWING TYPE	CUSTOMER DRAWING
SCALE	1:1
SHEET	1 OF 1
DRAWING NO.	W11000252

- Material
 - ØButton : PA66, UL94V-0
 - ØCover : PA66, UL94V-0
 - ØHousing : PA66, UL94V-0
 - ØReed : Stainless steel
 - ØPin header : Copper alloy, Tin plated
- Electrical
 - UL IEC
 - Rated voltage : 300V 450V
 - Rated current : 5A 15A
 - Contact resistance : 20mΩ(Max)
 - Insulation resistance: 500MΩ/DC500V
 - Withstanding Voltage : AC2000V/1min
 - Wire range: 20-18AWG 1.5mm²
- Mechanical
 - Operating temperature:-40°C~+105°C
 - Soldering temperature:250°C±5/5sec
 - Strip length: 8-9mm
- RoHS compliance

HOW TO ORDER

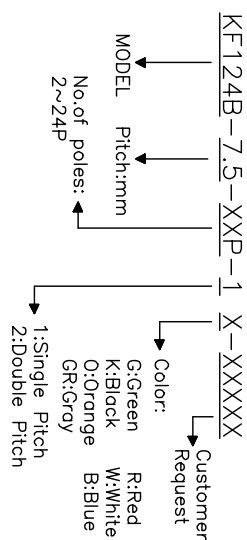

DF 慈溪市凯峰电子有限公司
CXI KAIFENG ELECTRONICS CO.,LTD