

REV.	DESCRIPTION	DATE	DRAFTER	APPROVER
A1	DWG.REL	2020.06.10	DENG	JIN



- Material
  - ①Housing: PA66, UL94V-0
  - ②Plastic cover: PA66; UL94V-0
  - ③Clip: Copper alloy, Silver plating.
  - ④Reed: Stainless steel

- Electrical
 

UL	IEC
Rated Voltage: 300V	630V
Rated Current: 15A	16A
Contact Resistance: 20mΩ	
Insulation Resistance: 500MΩ/DC500V	
Withstanding Voltage: AC1500V/1Min	
Wire range: 28-12AWG 0.2-2.5mm <sup>2</sup>	
- Mechanical
 

Temperature Range: -30°C~+105°C  
MAX Soldering: +250°C,(5 Seconds)
- RoHS compliance

HOW TO ORDER  
KF475B1-7.5-XXP-1 X-XXXXX

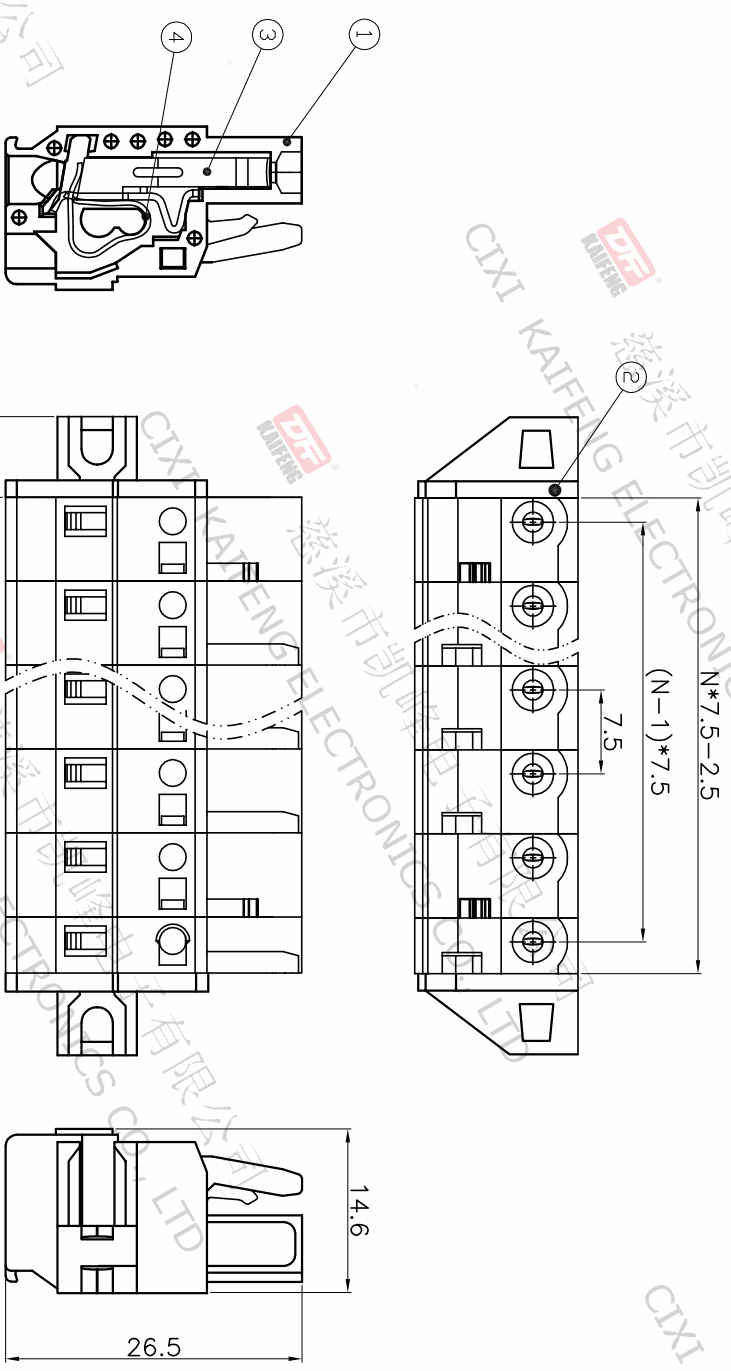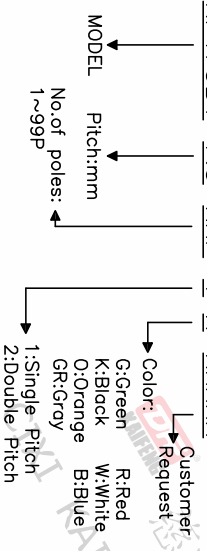

Pitch range	Nominal dimension range	PROJECTION	UNIT	TITLE
>0	>30	0.1/10	mm	KF475B1-7.5-XXP-1X
~6	~30			
~10	~60			
~24	~100			
~30	~150			
±0.15	±0.30	±2°		
±0.20	±0.30			
±0.30	±0.50			
±0.70	±1.00			
±1.30	±1.30			

DRAWING TYPE	CUSTOMER DRAWING	SHEET	1 OF 1
SCALE	1:1	SHEET	1 OF 1
DRAWING NO.	W16000212		

**DFE** 慈溪市凯峰电子有限公司  
CIXI KAIFENG ELECTRONICS CO.,LTD